




CROSS SECTION

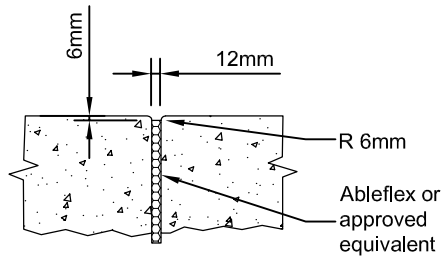

**EXPANSION JOINT
at 9m intervals**

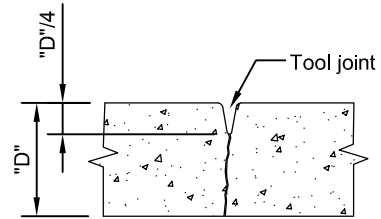

**TYPICAL INDUCED CRACK/
TOOLED JOINT**

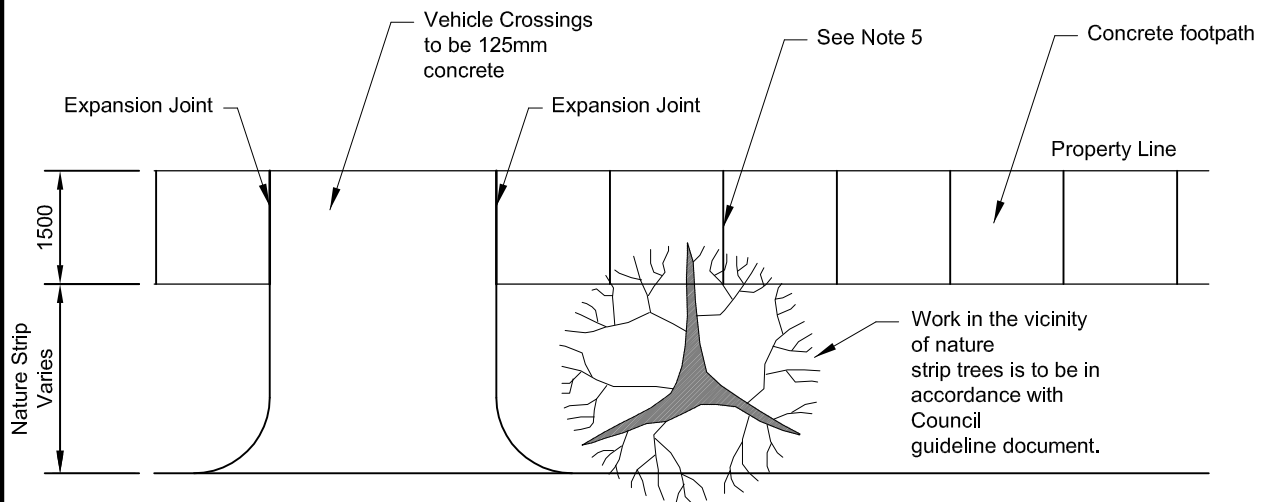

PLAN

NOTES

1. Construction joints 20mm deep and 4mm wide shall be formed with a cutting tool every 1500mm.
 2. Full depth expansion joints with approved 12mm expansion joint material shall be placed every 9m and both sides of driveways.
 3. Finish shall be stipple trowel/broom finished.
 4. Footpath sections of vehicle crossings shall be 125mm depth.
 5. Trip Stop to be used instead of tool joints within root zone/under drip line of trees likely to lift footpath.
- As directed by Bayside City Council.**



Standard Drawing Title

**CONCRETE
FOOTPATH
CONSTRUCTION**

Scale
1:20, 1:100

References to:

Standard Drawing No.

BCC202
Page 1 of 1

Rev:

A

Approved
Manager Engineering Services

Date: 29-Jan-09