


### CONCRETE FOOTPATH REPAIR

Note: Always replace full slabs.

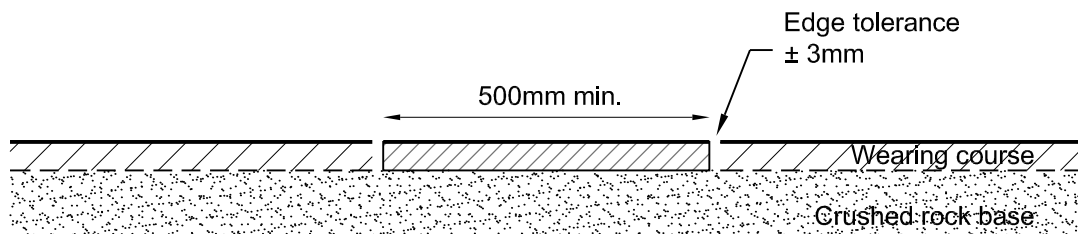

### ASPHALT FOOTPATH REPAIR

#### Notes:

1. Finished surface to be no more than 10mm below a straight edge in any direction over the new asphalt surface or slab.
2. This drawing should be used as a Standard for the minimum size of footpath repairs and for surface finish tolerances. All other details to be in accordance with the relevant Standards for new footpaths.



**Bayside**  
CITY COUNCIL

www.bayside.vic.gov.au  
Tel. 9599 4444

## LOCALISED FOOTPATH REPAIR TOLERANCES

Scale: NTS

**SD 04B**

Page 1 of 1

Approved  
Manager Asset Management

Date: 29 September 2010

Cad File: SD 04B